



### 描述

三防泛光灯外壳由铝合金压铸成型，高强度，表面高压静电粉末喷涂，耐腐蚀强。外露紧固件采用不锈钢材料。内装高纯铝镜面反射器，照明范围大、亮度高。三防泛光灯从下面进线，适用于橡套电缆布线。根据用户不同的要求可选配不同的光源，适用于厂房、车站、港口、工业建筑、城市广场等场所的大面积照明之用。

三防泛光灯设有角度调节盘，可适用于不同角度的照明。

- 防护等级高达IP65
- 安装维护方便

### Descriptions:

The enclosure of weather-proof floodlight light fitting is die-cast aluminum alloy, with the high strength, high sprayed static powder surface and strong anticorrosion. The material of the exposed fastener is stainless steel. Built-in the high purity aluminium specular reflector, the illumination range is large and brightness is high. The cable inlet of the floodlight light fitting is in the downside, which is suitable for the rubber-sheathed cable wiring. The different light source can be selected according to the user's request. It is suitable for the workshop, station, port, industrial building and urban square which is required a large area of illumination.

The weather-proof floodlight light fitting is equipped with angle adjustment plate, which is suitable for different angles of lighting.

- The degree of protection is up to IP65.
- It is convenient to be mounted and maintained.

● **主要数据 Main technical data:**

防腐标志: WF1  
 防护等级: IP65  
 额定电压: 220V AC 50Hz  
 220V AC, 230V AC, 240V AC 50Hz, 60Hz  
 使用环境温度:  $-40^{\circ}\text{C} < \text{Ta} < 50^{\circ}\text{C}$   
 接线端子: L1, N:  $2 \times 2.5\text{mm}^2$ , PE 端子  $2 \times 2.5\text{mm}^2$   
 电缆入口: 塑制  $1 \times \text{M}20 \times 1.5$ , 电缆外径:  $\Phi 5.5\text{-}13\text{mm}$

Corrosion-proof mark: WF1  
 Degree of protection: IP65  
 Rated voltage: 220V AC 50Hz  
 220V AC, 230V AC, 240V AC 50Hz, 60Hz  
 Ambient temperature:  $-40^{\circ}\text{C} < \text{Ta} < 50^{\circ}\text{C}$   
 Terminal: L1, N cage type terminal  $2 \times 2.5\text{mm}^2$ ,  
 PE terminal:  $2 \times 2.5\text{mm}^2$   
 Cable entry: Moulded plastic  $1 \times \text{M}20 \times 1.5$ ,  
 Outside diameter:  $\Phi 5.5\text{-}13\text{mm}$

● **订购规格 Order specifications:**

图样 Illustration	光源代号 Code of light source	灯座代号 Lampholder code	功率 Power	重量 Weight	订购号 Order No.
	金属卤化物灯-J Metal halide lamp-J	E40	250W	12.55kg	<b>M107F/2-J250W25</b>
		E40	400W	14.26kg	<b>M107F/2-J400W25</b>
	高压钠灯-N High pressure sodium vapor lamp-N	E40	250W	12.55kg	<b>M107F/2-N250W25</b>
		E40	400W	14.26kg	<b>M107F/2-N400W25</b>


额定电压 Rated voltage ←  
 2 — 220V AC  
 3 — 230V AC  
 4 — 240V AC  
 额定频率 Rated frequency ←  
 5 — 50Hz  
 6 — 60Hz

● **光源备件 Spare parts of light source:**

图样 Illustration	功率 Power	灯座 Lampholder	光通量 Luminous flux	单位 Unit	订购号 Order No.
	250W	E40	20500lm	只 Piece	<b>HQI - T 250/D</b>
	400W		32000lm		<b>HQI - BT 400/D</b>
	250W	E40	27000lm	只 Piece	<b>NAV - T 250</b>
	400W		48000lm		<b>NAV - T 400</b>

● **外形及安装尺寸**


Outline and installation dimensions:

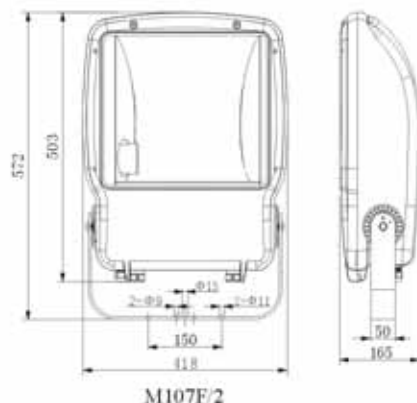


M107F/2

● **配光曲线 Luminous intensity distribution curve:**

光强单位 luminous intensity unit:  $\text{cd}/1000 \text{ Lm}$   
 — C0/180  
 — C90/270



M107F/2-N250W



M107F/2-J400W